

# EQUIPMENT SPECIFICATIONS

### **CITY BLENDS CONTACT**

STEPANIE SUDDARTH
877.5.BLENDS
STEPHANIE@CITYBLENDS.COM

### **EQUIPMENT CONTACT**

TODD SPARKS
866.345.8642 EXT. 17
TODD.SPARKS@DIRECTSOUTH.COM



### **BD8-W DIMENSIONS:**

17.75"W x 11.5"D x 19"H Clearance for air flow required.

### **How THE BD8 Works**

Your recipe is entered into the BD8 by accessing the programming mode of the microprocessor. Input up to 32 recipes into memory. To make a drink, enter the recipe number into the touchpad.

The microprocessor directs peristaltic pumps to draw ingredients through external supply lines. The pumps precisely meter product into a blender jar containing ice in the blending chamber. Water, if desired, is added to complete the recipe.

As ingredients are dispensed into the blending jar a 3.5 peak horsepower motor begins the blending process. A pre-programmed blend cycle speeds the delivery of your drink-ready to serve.





### **ADDITION BINS**

Stacking Dispensers, 4w x 11d x 7h 8 - #927 recommended. Brackets are included.

### PROTEIN BINS

Top Load Single Bin 41/4 x 12 x 161/2
Top Load Triple Bin 13 X 12 X 161/2
2 - #946 recommended. Brackets are included.

### CONTACT


Todd Sparks todd.sparks@directsouth.com 866-345-8642 ext. 17







### TUC-Series: Standard Depth Undercounter Units

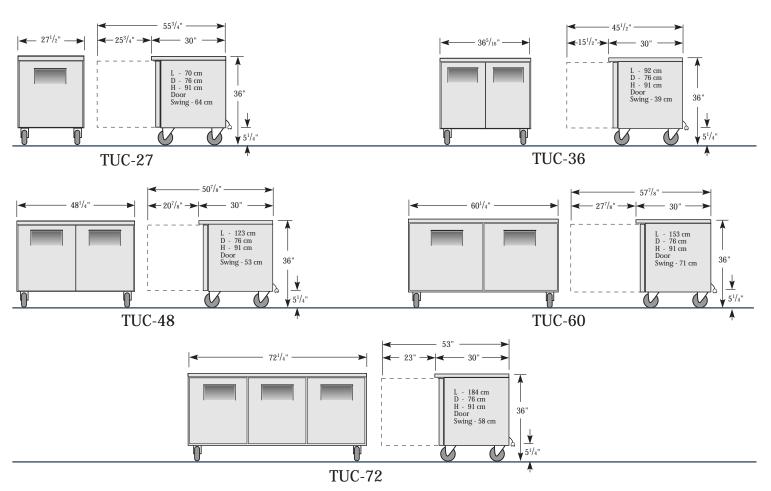

Rough-In Data													
				Dir	Dimensions							Cord	
		Capacity	# of	<b>(</b> j	inches	)					NEMA	Length	Crated
Model	Doors	(Cu. Ft)	Shelves	L	D	Н	HP	Volts	PH	Amps	Config.	(feet)	Weight
TUC-27 (1, 2, 3, 4)	1	6.5	2	27 1/2	30	36	1/5	115	1	4.0	5-15	7	161
TUC-36	2	8.5	4	36 1/2	30	36	1/5	115	1	4.0	5-15	7	161
TUC-48 (1, 2, 3)	2	12	4	48 1/4	30	36	1/3	115	1	9.0	5-15	7	243
TUC-60 (1, 2, 3)	2	15.5	4	60 1/4	30	36	1/3	115	1	8.0	5-15	7	287
TUC-72	3	19	6	72 1/4	30	36	1/2	115	1	11.0	5-15	7	350

- (1) Available in drawered model
- (2) Available in freezer model
- (3) Available in glass door model
- (4) Available in glass door freezer

### **Standard Features**

- Stainless steel front, top and sides.
- White anodized aluminum interior and stainless steel bottom.
- Oversized and balanced, environmentally friendly refrigeration system - holds 32 F-38 F (134A, refrigerator), -10 F (R404A, freezer).
- Front breathing
- Work surface 36" high.
- Recessed handles on solid door models; glass door models feature triple pane glass and 12" aluminum handles.

- Door swings within cabinet dimensions.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Aluminum finished back.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- Foamed-in-place high density polyurethane insulation (CFC free).
- 5" castors standard equipment.
- 1 year parts & labor warranty (USA)
- 5 year compressor warranty

### Optional Accessories\_

- □ Drawered models
- □ Cutting board
- □ Stacking collar
- □6" Legs available
- □ 2 1/2" Castors available

Clearance Required For						
Coolers (USA)						
Sides	Rear					
Inches/mm	Inches/mm					
0 / 0	2 / 50					

Specifications subject to change without notice.

### TRUE FOOD SERVICE EQUIPMENT

## SCOTSMAN

UNDERCOUNTER COMPACT FLAKER WITH STORAGE



## AFE400

### **VOLUME PRODUCTION • 24 HOUR**

Based on	Air-	Cooled	Water-Cooled		
Air/Water Temperatures	70°/50° lbs.	90°/70° lbs.	70°/50° lbs.	90°/70° lbs.	
AFE400	395/179	300/160	395/179	310/141	

### DEPENDABLE PERFORMANCE IN ANY CONDITION

- Delivers steady flow of ice for fast recovery of ice supply.
- 7-ft. power cord for quick installation.
- · Completely serviceable from the front side.
- 3-piece cabinet is easily removable from front.
- Rear utility connections.
- Cabinet constructed of durable rust-free rotocast plastic.

### **WARRANTY** See your dealer for complete warranty details.

- 2 years parts on all components.
- 2 years labor on all components.
- 5 years parts on compressor.



UNDERCOUNTER INSTALLATION Adapts to numerous undercounter applications. Fits under any 40" counter.




SLIDE AWAY ACCESS DOOR Provides convenient and easy access to ice.





## Ice Machine Specifications

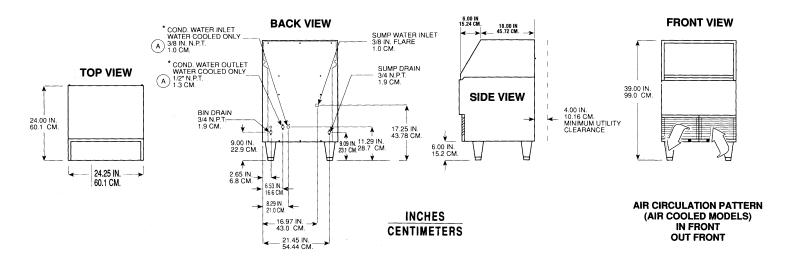

INSTALLATION NOTE: Allow 6" minimum space at left side and back for ventilation and utility connections.

	All models: Dimensions: W x D x H without legs (Add 6" height for legs): Unit: 24 <sup>1</sup> / <sub>4</sub> " x 24" x 33" Shipping Carton: 27" x 27 <sup>1</sup> / <sub>2</sub> " x 38"											
	Model Number	Condenser Unit	Bin Cap. lbs./kg.	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker	Comp. HP	Circuit Wires	Min. Circuit Ampacity	Shipping Weight lbs./kg.	Power Consumption KWH/100 lbs. 90°F/70° F	Potable	Usage /100 lbs. Condenser   90°F/70° F
	AFE400A-1A	Air	80/36	115/60/1	15	1/4	2	Cord	185/84	5.4	12.0	-
ı	AFE400W-1A	Water	80/36	115/60/1	15	1/4	2	Cord	185/84	5.0	12.0	131.0

Finish: Rotocast grey plastic. Refrigerant R-134A.

designed for outdoor installations.

....

Four black plastic legs screw into mounting plates on cabinet base. Provide

6" minimum height including adjustable leveling foot.

Scotsman's ice machines are not designed for outdoor installations. Scotsman remote condensers are

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

**Consult Your Local SCOTSMAN Representative At:** 

### **IMPORTANT OPERATING REQUIREMENTS:**

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (37.7°C)
Water Temperatures	40°F (4.4°C)	100°F (37.7°C)
Water Pressures	20 PSIG	120 PSIG
Electrical Voltage	-5%	+10%




### STAINLESS STEEL



## REGALINE SINKS T9 SERIES

### **NEW** Tile Edge Design



### **FEATURES:**

Tile edge for ease of installation.

One piece **Deep Drawn** sink bowls with integral drainboards with splash.

Featuring the single bowl unit design.

All sink bowls have a large liberal 3" radius.

Placement of the welded leg assembly ensures stability and furnishes direct support of the column load requirement for the entire sink unit.

#### **CONSTRUCTION:**

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Gussets welded to a die-embossed reinforcing channel.

#### **MECHANICAL:**

Supply is 1/2" IPS hot & cold.

Faucet holes on 8" centers.

Faucets are not included (see accessories).

Waste drains are 1 1/2" IPS S/S basket type and are included.

#### **MATERIAL:**

1 5/8" diameter galvanized legs and gussets.

1" adjustable plastic bullet feet.

Bowls are heavy gauge stainless steel type 304 series.

Drainboards, splash and rolled rims are fabricated using heavy gauge stainless steel type 430 series.

### One Compartment

Bowl Size	MODEL #	Qty
16 x 20	T9-1-24	
16 x 20	T9-1-24-18R or L	
20 x 20	T9-21-20	
24 x 24	T9-41-24	

### Two Compartments

Bowl Size	MODEL #	Qty
16 x 20	T9-2-36	
16 x 20	T9-2-36-18RL	
20 x 20	T9-22-40-18RL	

### Three Compartments

Bowl Size

	DOWI SIZE	WODEL #	Gity
	16 x 20	T9-3-54	
	16 x 20	T9-3-54-18R or L	
	16 x 20	T9-3-54-18RL	
14" Deep Bowls	16 x 20	T9-3-54-18RLH	and the same of th
	20 x 20	T9-23-60-18RL	
14" Deep Bowls	20 x 20	T9-23-60-24RLH	
	24 x 24	T9-43-72-24RL	
	20 x 28	T9-83-60-18RI	

### Four Compartments

Bowl Size	MODEL #	Qty
16 x 20	T9-4-72-18RL	

ACCESSOR	ES	MODEL #	Qty
DRAINS			
FAUCETS			

### **DETAILS and SPECIFICATIONS**


## 12" Water Level Accommodates Pot & Dish Applications

All **Deep Drawn** Sink Bowls Type 304 Stainless Steel.
All Units Feature Galvanized Legs and Plastic Bullet Feet.


TOL ± .500" ALL DIMENSIONS ARE TYPICAL

MODEL #	BOWL SIZE	O.A. Length	# of Comp.	# of Drbds.	Α	В	Ε	Wt
T9-1-24	16x20	25"	1	0	15"	12"	22"	44 lbs.
T9-1-24-18R or L	16x20	40"	1	1	15"	12"	22"	54 lbs.
T9-21-20	20x20	29"	1	0	15"	12"	22"	52 lbs.
T9-41-24	24x24	33"	1	0	15"	12"	22"	76 lbs.
T9-2-36	16x20	44"	2	0	15"	12"	22"	66 lbs.
T9-2-36-18RL	16x20	73"	2	2	15"	12"	22"	73 lbs.
T9-22-40-18RL	20x20	81"	2	2	15"	12"	22"	82 lbs.
T9-3-54	16x20	62"	3	0	15"	12"	22"	81 lbs.
T9-3-54-18R or L	16x20	77"	3	1	15"	12"	22"	87 lbs.
T9-3-54-18RL	16x20	91"	3	2	15"	12"	22"	100 lbs.
T9-3-54-18RLH	16x20	91"	3	2	17"	14"	20"	100 lbs.
T9-23-60-18RL	20x20	103"	3	2	15"	12"	22"	122 lbs.
T9-23-60-24RLH	20x20	115"	3	2	17"	14"	20"	131 lbs.
* T9-43-72-24RL	24x24	127"	3	2	15"	12"	22"	190 lbs.
T9-83-60-18RL	20x28	103"	3	2	15"	12"	22"	200 lbs.
* T9-4-72-18RL	16x20	110"	4	2	15"	12"	22"	185 lbs.

<sup>\*</sup>Two Faucets Required








Stainless Steel Basket Type Drains are Standard on All Sinks.

Bowls	F	G	Н
16 x 20	27"	20"	14"
20 x 20	27"	20"	14"
24 x 24	31"	24"	16"
20 x 28	35"	28"	18"





ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.



STAINLESS STEEL

## DROP-IN SINKS

## **One Compartment**

For ADA Compliant Sinks add modification # K-148 and Specify bowl depth with a 4 1/2", 5 1/2", 6", 6 1/2"

Item	#:	

Project #:\_\_\_\_\_

Model #:\_

### SELF-RIM for Hand Sink Use!

Supplied with K-52 Faucet




DI-1-5



DI-1-10

Model #	Qty
DI-1-5	
DI-1-10 🐯	
DI-1-25 🐯	
DI-1-30	
DI-1-35	
DI-1-168	
DI-1-208	
DI-1-2012	
DI-1-2812	

### **Replacement Faucets**















LARGEST ONE COMPARTMENT DROP-IN SINK IN THE INDUSTRY! Supplied with K-53 Faucet with 12" Spout.






**NEW YORK** (800) 645-3166 Fax: (631) 242-6900 **GEORGIA** (800) 832-1218 Fax: (770) 775-5625 **TEXAS** (800) 527-0353 Fax: (972) 932-4795

**NEVADA** (800) 446-8684 Fax: (775) 972-1578

### **DETAILS and SPECIFICATIONS**

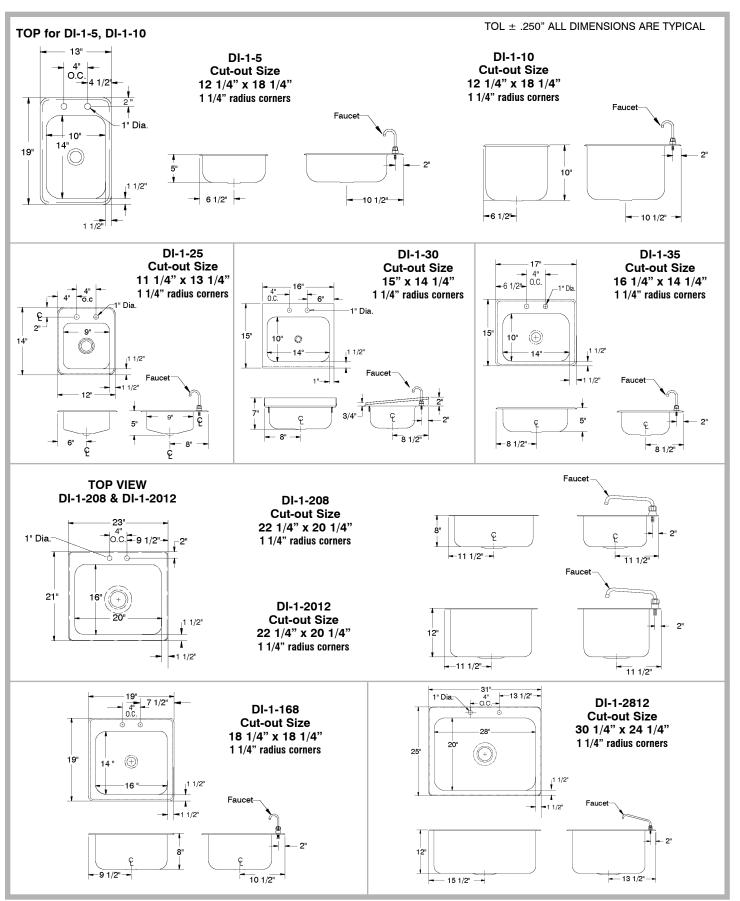





## CITY BLENDS™ JUICE BAR & PROFIT CENTER EQUIPMENT LIST COSTS

ITEM	QTY	DESCRIPTION	UNIT PRICE	TOTAL
1	2	DI-1-5 Advance 1-compart. s/s drop-in sink w/ faucet	138.00	276.00
Option 2	1	DI-3-10 Advance 3-compart. s/s drop-in sink w/ (2)	518.00	
		swing spouts faucets		
	1	B113B T&S Base mount pre-rinse faucet w/ wall bracket	245.00	
				763.00
		OR		
Option 3	1	FC-3-1818-18RL S/S 3-compart. s/s floor style	840.00	
		sink w/ legs		
	1	B-0133-01 Wall mount pre-rinse faucet with wall	315.00	
		bracket & add-on swing spout faucet with 12" spout		1,155.00
4	1	AFE400A Scotsman undercounter flaker ice machine		2,595.00
5	1	9324-01 Everpure single cartridge water filter system		195.00
		for above Scotsman flaker		
6	1	TUC-48 True Under counter 2-door refrigerator w/casters		1,599.00
	Terms:	City Blends Charge Card or Certified Check		

<sup>\*</sup>All suggested product and equipment costs listed, combined with the City Blends™ customer service training and trademarked City Blends™ recipes, creates the streamlined, portion controlled City Blends™ drinks that has made us the best juice bar in the health and fitness industry. The use of other than approved City Blends™ equipment, juices, frozen goods or powders is prohibited. The prices above are provided as an estimate only and are subject to change.